

TP960

HIGHLY RELIABLE PRODUCTION MONO / COLOUR PRINT SYSTEM

The Logika TP960 is the most reliable mid-range thermal printer on the market.

With its large capacity auto feeder and output stacker the TP960 is the ideal bureau production system.

By continuing the policy of integrating the very latest technology into the TP960, Logika have ensured a fast and highly reliable system. Logika's same great build quality is also maintained - all leading to a superb price: performance ratio.

FEATURES

- mid-range desktop thermal printer
- multi-task technology: up to 3 cards working simultaneously
- superbly engineered
- top quality components and construction

AVAILABLE FUNCTIONS

- HiCo/LoCo magnetic encoding (ISO 7811)
- Standard flip-over module for dual-sided printing
- Read back functions allows the TP960 to work in conjunction with other systems e.g. the Logika Mailer III match mailer and LC700
- Smart card module
- Contactless card module

TECHNICAL SPECIFICATION

- Auto feeder: 350 cards
- Colour resolution: 300 dpi
- Magnetic encoding 300/2750 Oersted ISO7811
- Motor driven encoder
- IC card initialisation: ISO 7816 standard
- Print area 81 x 51 mm
- Printing direction 90°, 180°, 270°
- All Windows fonts + 4 downloadable logo areas
- Various ribbon colours available
- Barcodes (all resident) 2/5 interleaved, EAN 8, EAN 13, Code 128, Code 39 etc
- 8mm aluminium alloy plate chassis
- Automatic output stacker: 700 cards
- Automatic reject hopper: 50 cards

SYSTEM SPEED


- Up to 950 ISO CR80 cph (monochrome)
- Up to 300 ISO CR80 cph (colour)

CARD SPECIFICATIONS

- Card ISO standard laminated CR80
- Dimensions: ISO 7810
- Thickness: 0.76 mm

SOFTWARE

- Operating system: Windows XP
- Included application software: Badge
- Additional tools for fonts and DB

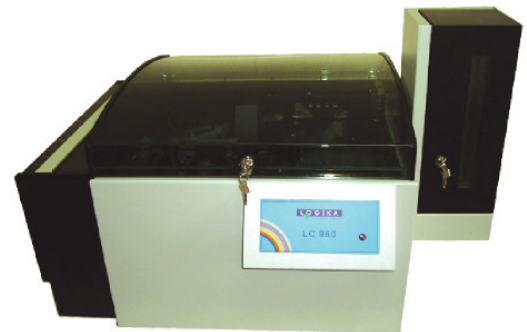

HOST CONNECTIONS

Multi-port serial card

POWER SUPPLY

220 V / 50 Hz or 110 V / 60 Hz

Single phase

DIMENSIONS AND WEIGHT

Dimensions 620 x 810 x 530 mm

Weight 55kg

ENVIRONMENTAL CONDITIONS

Operating Temperature: 14 – 27°C

Humidity: 20% - 85% non-condensing

LOGIKA

A LOGITONG COMPANY

Logika Technology Srl
Via de Vizzi 77
20092 Cinisello Balsamo
Milano
Italy
Tel ++39(0)26123477
Fax ++39(0)26659422
www.logika-italy.com